

Base floor repair of a Single-family house



Description

The base floor of the 1940s house was microbially damaged. The floor was taken down and the subfloor was repaired into a modern heat sink. An 8-16 mm capillary garland was installed against the ground. EPS insulation 200 mm was installed on top of it. The seams of the insulation were sealed with Elaproof. The tightness was confirmed by tightness measurement and thermal imaging. There is mechanical ventilation and room heating under the floor of the house. Insulation and Elaproof also acts as a radon barrier.

Project information

Client: Private house

Project: Indoor Air Sealing + Radon barrier

Material: Wood + other


Contractor: Paloniitty Oy

Supervisor: Sauli Paloniitty, Paloniitty Oy

Time and city: 07/2020

Products used in the project

- [ElaProof Indoor H](#)
- [ElaProof Primer](#)
- [ElaProof Base Fabric](#)

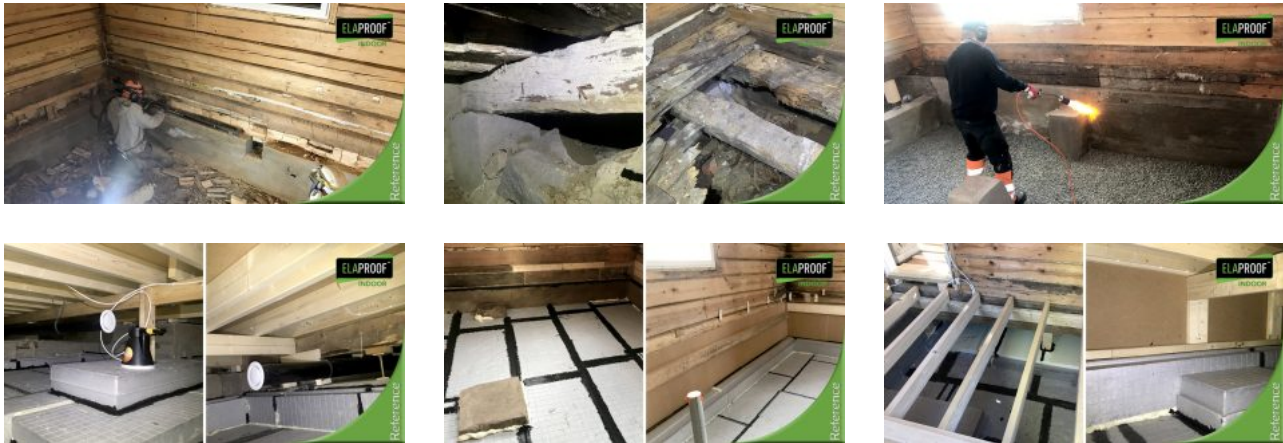

All the information presented above is based on research results, our current knowledge and experience. They do not remove the responsibility of the user of the product to carry out his own tests and experiments, so that all factors and conditions that may affect the installation and use of the products should be considered. No guarantees regarding the properties or suitability of the product for specific purposes can be given based on this information. All descriptions, drawings, photos, information, proportions, portion sizes, weights, etc. are indicative. We are not responsible if the product is used contrary to the instructions presented here. It is the responsibility of the user of the product to test the suitability of the product for the purpose of use. We are only responsible for the quality of the product and guarantee that it will pass our critical quality control. Product information is updated regularly, however, it is the user's responsibility to obtain the latest valid product information, which can be found at www.elaproof.com. We reserve the right to make changes. © Build Care Oy